Pump Unit for Scroll Drive

Type Key

Pump unit	B/C	15	–	22.0	Z	U	/	HP	–	W	–	50	/	10	–	ATEX

Control
VFD = Electro-Hydraulic
B/C = Electro-Hydraulic
C = Hydraulic-Manual

Power E-Motor [kW]

Displacement Pump [cc/rev]

Pump Type
Z = Gear Pump
K = Axial Piston Pump

Operation
(blank) = Standard 50 Hz/60Hz
U = 60 Hz (USA, with flange)

Pressure Type
LP = Low Pressure (170 bar)
HP = High Pressure (280 bar)

Cooler Type
A = Oil Air Cooler
W = Oil Water Cooler

Tank Capacity [l]

Nominal Size Control Block

Protection Class
(blank) = Standard (no ex protection)
Ex = Ex protection for USA
ATEX = Ex protection, Dir 2014/34/EU

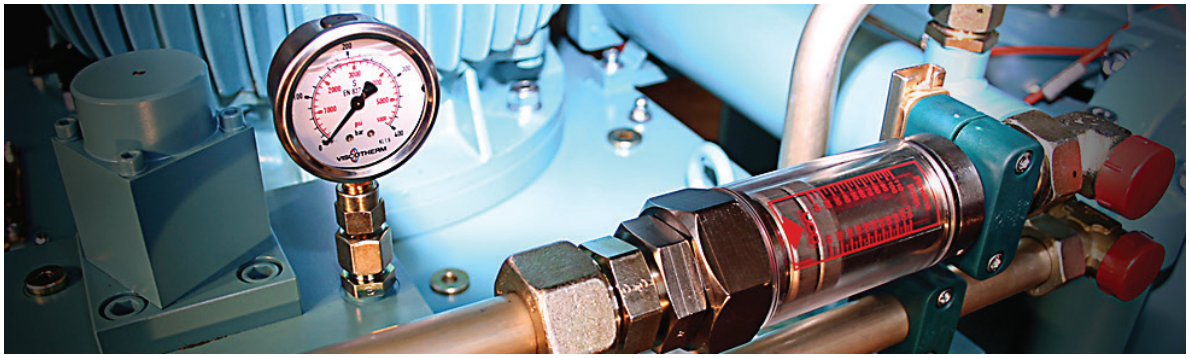

VISCOTHERM Im Ufgänt 10 | 8132 Hinteregg-Zürich | Switzerland | Tel. +41 (0)44 986 28 00 | Fax +41 (0)44 986 28 28 | www.viscotherm.ch